SUNNY
LIGHT FOR LIFE

Accessories - LED Downlight | DLS Series

Model : DL-S 220-109

Product Overview

Downlight Lamp recessed ceiling type DLS Series. The lamp can adjust the direction of the beam for 45 degrees. The lamp works with the installation of LED bulb LED MR16 GU5.3 by operating with emergency lighting control system.
Central battery Systems of 220VAC in case of power failure, will provide emergency lighting for escape.

Technical Specifications

Model	DL-S 220-109
Input Voltage	220VAC
LED Lamp Power	9W
Lumen (lm) / Bulb	810
Lamp Type	LED MR16
Base	GU5.3
CCT	Warm White (3000K ± 250K) Daylight (6000K ± 250K)
CRI	>80
Lamp Life Time	50,000 Hrs
Beam Angle	50 Degree
IP Rating	20
Dimension LxWxH (mm)	100 x 100 x 60
Material	Diecasting aluminium
Weight (g)	240
Hole cut W xL (mm)	W90 x L90
Lamp Warranty	10 Year
Mounted	Recessed Ceiling

Dimensions (mm)

FRONT VIEW

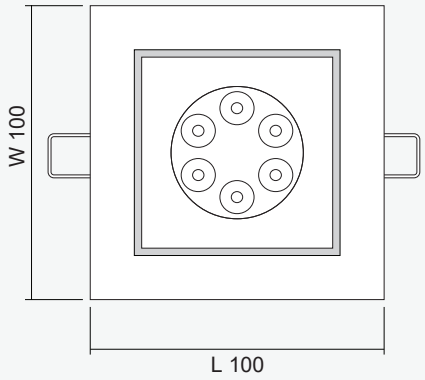

SIDE VIEW

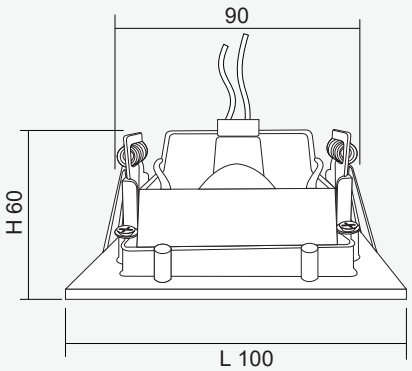

IsOn Import-Export Co., Ltd. | All rights reserved | LED Downlight Product Datasheet | Rev.100221
2915-2917 Ladprao Road, Klongjan, Bangkapi, Bangkok 10240 Thailand | www.sunnyemergencylight.com | intertrade@sunnyemergencylight.com
The company reserves the final right for explanation on any of the information presented hereby.