




Technical Specifications

| | |
|-------------------------|--|
| Mode of Operation | Non-Maintained |
| Input Voltage | 220VAC / 50Hz ± 10% |
| Output Voltage | 12VDC |
| Maximum Power Load | 1100W |
| Battery Type / Capacity | Sealed Lead-Acid Maintained Free 12V-130Ah x 2 |
| Protections | - AC. Fuse - AC, DC Circuit Breaker - Output Circuit Breaker - AC. Input Over & Under Voltage Protection - Battery Low Voltage Cut-Off |
| Testing Systems | Manual Testing |
| Charging Mode | Constant Voltage & Limit Current |
| Charging Time | 10 -15 Hrs |
| Backup Time | 2.0 Hrs |
| Housing | Electro-galvanized steel sheet 1mm. thick with epoxy powder coating |
| Dimensions (LxWxH) | 620 x 400 x 950 mm |
| Weight | 119.00 Kg |
| IP Rating | 20 |

Indicators

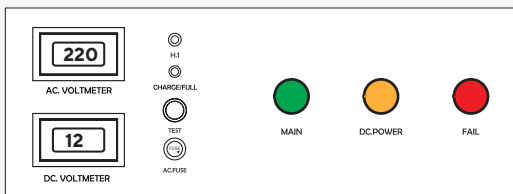

- AC. VOLTMETER ▶ Indicating the input voltage
- DC. VOLTMETER ▶ Indicating the battery voltage
- LED H1 ▶ Indicating the status of the input under voltage or over voltage
- LED Charge/Full ▶ Indicating charging status
- SWITCH TEST ▶ For testing the device's availability (during normal circumstance)
- AC. FUSE ▶ Short-circuit protection of AC input
- LED MAIN ▶ Indicating the status of the input voltage of 220VAC
- LED DC.POWER ▶ Indicating the status of the output voltage
- LED FAIL ▶ Indicating the failure status of the control unit

Product Overview

Central Battery Systems by CCU 12V Series or the central control unit is used to detect any abnormalities of the main power distribution system. In case of error or emergency, the unit is designed to allow the emergency lighting system to bear large loads or larger loads than that the automatic emergency light (complete unit) can. The 12 VDC unit is compatible with halogen lamp or MR16 LED lamp. The unit installation and usage are centrally controlled so that it supplies power to the lamp installed.

Features

- Operate for 2.0 hours on backup time
- Allowing testing with a switch on the front panel
- Automatically recharged with constant voltage and limited current
- Battery overcharge protection circuit prevents overcharge which is the cause of battery swelling
- Battery discharge protection circuit prolongs the battery life
- AC fuse prevents input short circuit
- DC fuse prevents short circuit on the battery or the load side
- Under voltage protection circuit allows the unit to automatically activate the emergency light in case any fault occurs in the the main power distribution system or in case of power failure (140-160 VAC)

Dimensions (mm)

