SUNNY
LIGHT FOR LIFE

Accessories - Remote Lamp | RCD Series (Double Lamp)

Model : RCD 24-212

Recessed Ceiling Mounted (R)

Dimensions (mm)

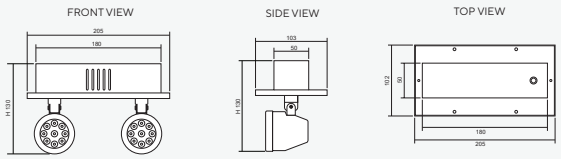

Surface Ceiling Mounted (C)

Dimensions (mm)

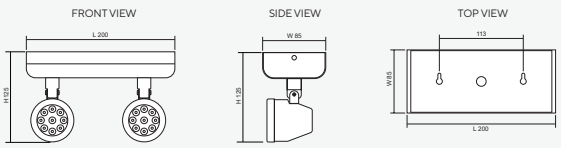

Surface Wall Mounted (W)

Dimensions (mm)

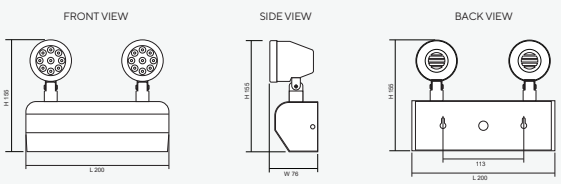

Product Overview

Remote lamp RCD Series Double Lamp Type, the lamp can adjust the direction of the beam in both the left, right and tilt angles.
The left, right can be adjusted about 180 degrees and 45 degrees for the tilt angle in the form of actual installation. The lamp works with LED bulb LED MR16 GU5.3 by receiving electric power from emergency lighting control system.
Central Battery Systems of 24VDC in case of power failure, will provide emergency lighting for escape.

Technical Specifications

Model	RCD 24-212
Input Voltage	24VDC
LED Lamp Power	2x12W
Lumen (lm) / Bulb	1,080
Lamp Type	LED MR16
Base	GU5.3
CCT	Warm White (3000K ± 250K) Daylight (6000K ± 250K)
CRI	>80
Lamp Life Time	50,000 Hrs
Beam Angle	50 Degree
IP Rating	20
Dimension LxWxH (mm)	- Recessed Ceiling 205 x 102 x 130 - Surface Ceilling 200 x 85 x 125 - Surface Wall 200 x 76 x 155
Material	Electro-galvanized steel sheet 1mm. thick with epoxy powder coating
Weight (g)	- Recessed Ceiling 820 - Surface Ceilling 710 - Surface Wall 730
Hole cut LxW (mm)	- Recessed Ceiling L185 x W55 - Surface Ceilling - - Surface Wall -
Lamp Warranty	10 Year
Mounted	Recessed/ Surface Ceiling/ Surface Wall

IsOn Import-Export Co., Ltd. | All rights reserved | Remote Lamp Product Datasheet | Rev.100221
2915-2917 Ladprao Road, Klongjan, Bangkapi, Bangkok 10240 Thailand | www.sunnyemergencylight.com | intertrade@sunnyemergencylight.com
The company reserves the final right for explanation on any of the information presented hereby.