


## Model : DL-SS 12-209




## Product Overview

The Downlight fixture, model DL-SS 12-209 Series, is designed for recessed installation. The fixture can adjust the light direction by 30 degrees. It is used in conjunction with an LED MR16 GU5.3 bulb and operates with Central Battery Systems, at 12VDC. In case of a power outage, it provides emergency lighting for safety.


## Dimensions (mm)

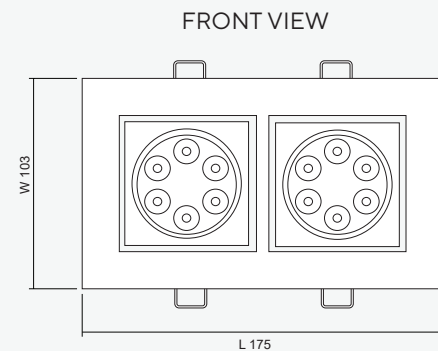

## SIDE VIEW

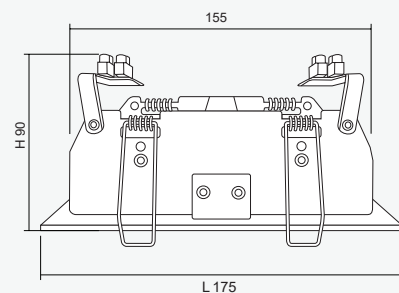

## LEFT /RIGHT VIEW



## Technical Specifications

Operating Temperature	10 to 50°C
Input Voltage	12VDC
LED Lamp Power	9W
Luminous Intensity	810 lm
Bulb Type	LED MR16
Base	GU5.3
Color Temperature	Warm White (3000K ± 250K) Daylight (6000K ± 250K)
Color Rendering Index	>80
Lamp Life Time	50,000 Hrs
Rated Beam Angle	50Deg
Degree of Protection	IP20
Dimension LxWxH	175 x 103 x 90 mm
Material	Diecasting aluminium
Weight	0.48 Kg
Hole cut LxW	155 x 85 mm
Mounted	Recessed Ceiling