




Product Overview


The Downlight fixture, model DLJ151 220-112 Series, is designed for recessed installation. The fixture can adjust the light direction by 45 degrees. It is used in conjunction with an LED MR16 GU5.3 bulb and operates with Central Battery Systems, at 220VAC. In case of a power outage, it provides emergency lighting for safety.

Dimensions (mm)

FRONT VIEW

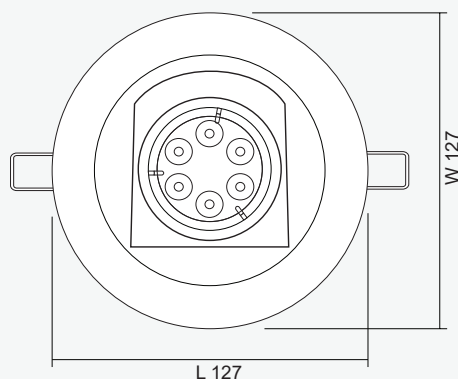

SIDE VIEW

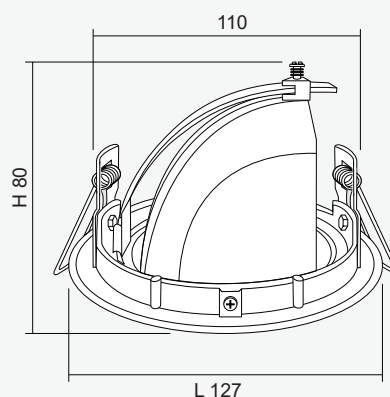

Technical Specifications

| | |
|-----------------------|--|
| Operating Temperature | 10 to 50°C |
| Input Voltage | 220 - 240VAC/ 50Hz |
| LED Lamp Power | 12W |
| Luminous Intensity | 1,080 lm |
| Bulb Type | LED MR16 |
| Base | GU5.3 |
| Color Temperature | Warm White (3000K ± 250K) Daylight (6000K ± 250K) |
| Color Rendering Index | >80 |
| Lamp Life Time | 50,000 Hrs |
| Rated Beam Angle | 50Deg |
| Degree of Protection | IP20 |
| Dimension LxWxH | 127 x 127 x 80 mm |
| Material | Diecasting aluminium |
| Weight | 0.27 Kg |
| Hole cut | 110 mm |
| Mounted | Recessed Ceiling |